

# DIGItel

*Within easy reach*

## IRIS Ø80

*twist and plug*


[www.digitel.rs](http://www.digitel.rs)



IRIS-B-1USBC4

Digitel IRIS Ø80 is adapted for easy installation in both panel surfaces as well as soft furniture such as arm-chairs and sofas. Power supply and connection with other interior devices is now even more accessible.



The unique design and high level of finish classify this product as a “must have”.

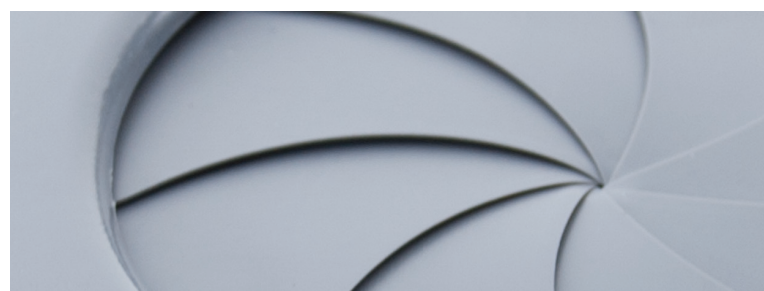

[www.digitel.rs](http://www.digitel.rs)



IRIS-W-1P

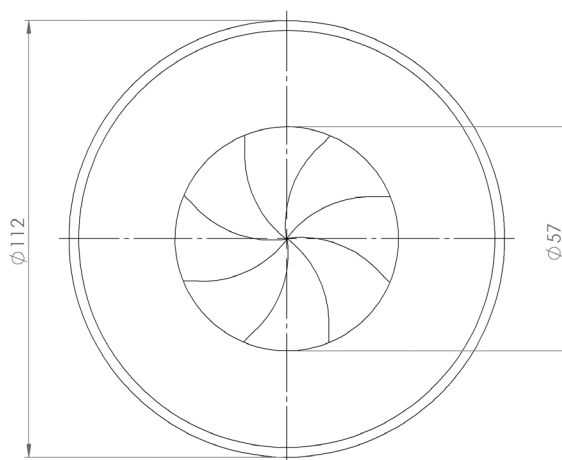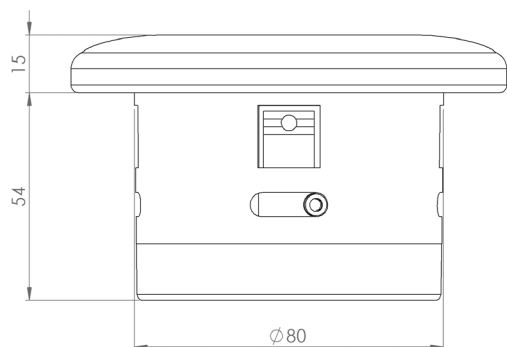

**POWER CHARACTERISTICS:**

**Voltage:** 250V  
**Amperage:** 16A  
**Power connector:** Wieland – male with cable  
 3x1,5mm<sup>2</sup> length 400mm  
**Frequency:** 50-60Hz  
**Temperature:** 0 – 40°C  
**Relative Humidity:** 0 – 95°C (no condensing)  
**Protection:** IP 43

**FIXATION:**


















With integrated plastic fixator turning the bottom cover in direction of the needle on the clock-thickness of the table bigger than 8mm

**DIMENSION:**

Ø 80mm

**COLOR:**


White  
 Electric grey  
 Gray  
 Black

- |   |                              |   |                        |
|---|------------------------------|---|------------------------|
|  | Power outlet (Schuko) 45x45  |  | USB charger 4A 4-ports |
|  | Power outlet (CH) 45x45      |  | USB hub 4-ports        |
|  | Power outlet (DK) 45x45      |  | XLR mini               |
|  | Power outlet (FR) 45x45      |  | Audio 3,5mm            |
|  | Power outlet Universal 45x45 |  | HDMI                   |
|  | Data Tunnel                  |  | VGA                    |
|  | RJ45 Cat6                    |  | Display port           |
|  | USB                          |   |                        |
|  | USB charger 2A 2-ports       |   |                        |
|  | USB charger 4A 2-ports       |   |                        |





By rotating the ring clockwise, the shutter opens, with its leaves concealed under the plastic cover, allowing access to a Schuko socket, a fast USB charger or to any pair of selected communication modules that are housed in the body of the product. Rotating the ring in the opposite direction, the shutter returns to its original position, protecting the modules from unwanted external influences.

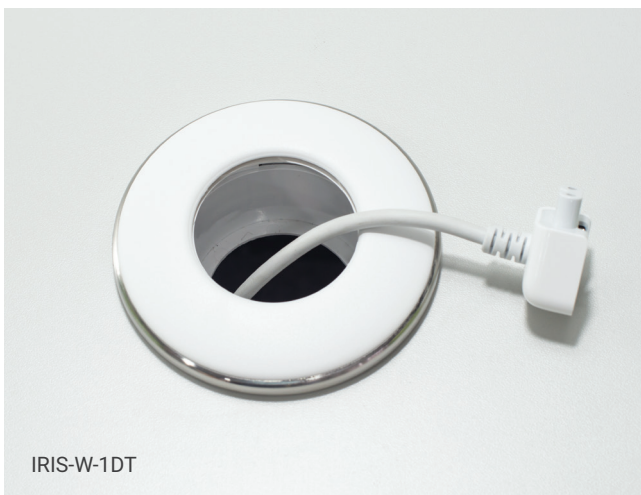

IRIS-W-1DT



IRIS-G-1P



It can be extremely simply and very securely installed in all types of panel surfaces (wood, wood products, glass, plastic, etc.). The innovative fixators are designed for all panel thicknesses above 9 mm, with no limitations. Prior to its positioning into the opening, the circular fixator, located on the back (underside) of the product, is rotated into the RELEASE position and the device is placed into a  $\varnothing 80$  opening ( $79.5 + 2$  mm). By rotating the fixator into the FIX position, the product's tines firmly grip the inner edge of the panel.



IRIS-B-1P



IRIS-G-1USBC2



Since 1996.

PRODUCT	COLOR	MODULES
IRIS	B	1USBC4

